

SOLO RA1-...-9 R V.2



Power from

2.4 W

Air flow up to

60 m³/h

Sound pressure level from

16 dBA



The Solo ventilator is the most suitable solution for utility rooms, closets, and cloakrooms.

Low power consumption will save electricity by providing clean and fresh air to any room with area of up to 15 m².



**ENERGY-SAVING
AND AFFORDABLE**



USER-FRIENDLY

Simple operation mechanism: speed switching using a pull cord switch.

CARING

Recovers heat energy and warms up supply air.
Helps control the air humidity level thanks to the built-in humidity sensor.

PRACTICAL

Prevents ingress of dust and foreign objects.




Easy to operate with the remote control.



Fresh and clean air where it is needed.



In cold weather it warms up fresh intake air to room temperature and exhausts stale air from the premise.

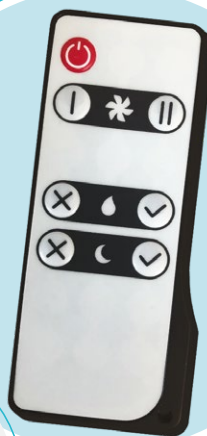


The humidity sensor and speed are controlled by the remote control.

Operation modes:

- Speed selection
- Humidity sensor ON
- Night mode




**SIMPLICITY
AND COMFORT**

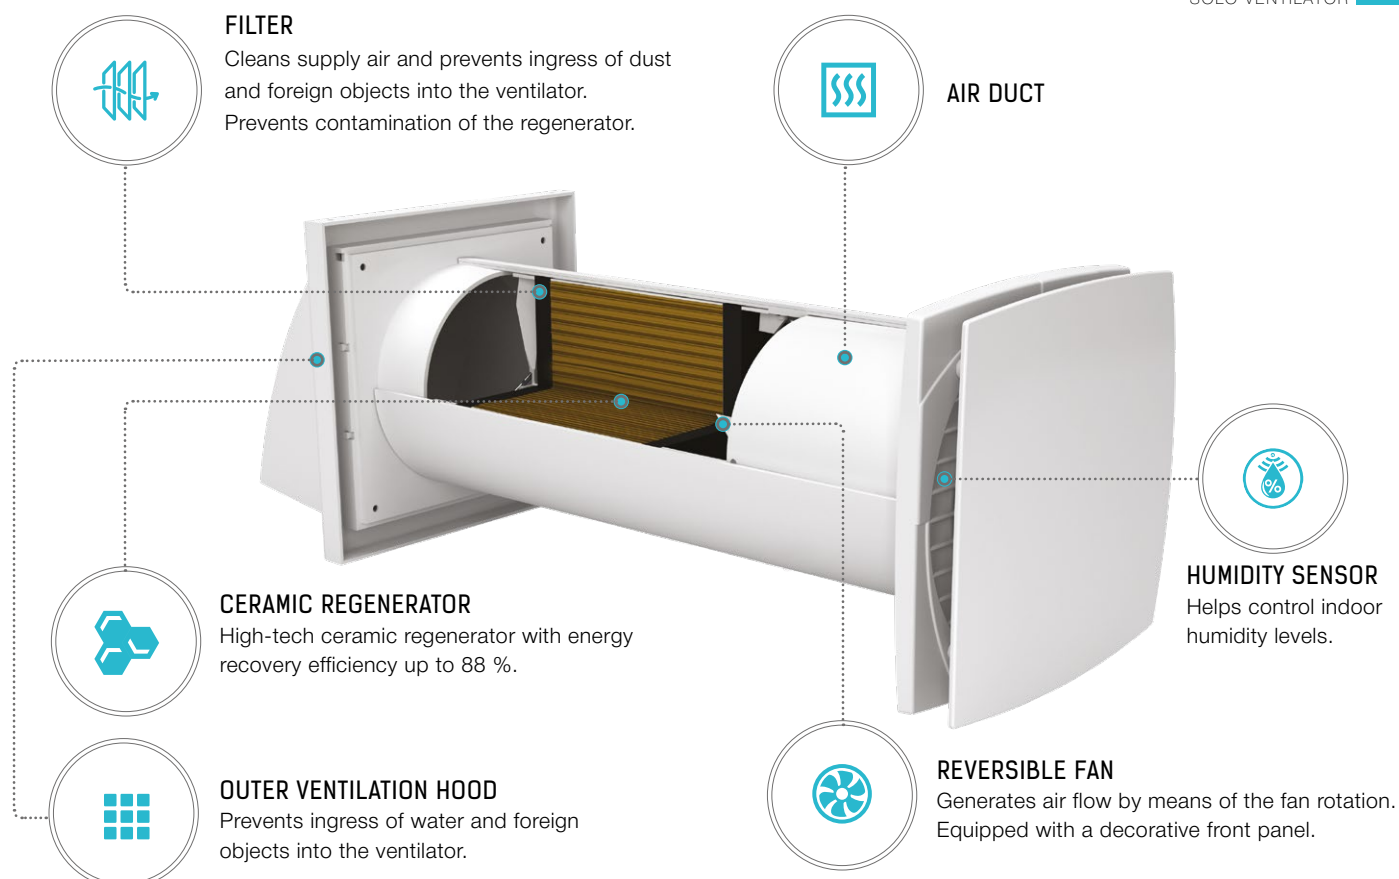

TECHNICAL DATA

Model	Solo RA1-35-9 R V.2		Solo RA1-50-9 R V.2		Solo RA1-60-9 R V.2	
Speed	I	II	I	II	I	II
Voltage / Frequency [V / Hz]	220-240 V 50/60 Hz		220-240 V 50/60 Hz		220-240 V 50/60 Hz	
Power [W]	2.40	3.70	2.30	4.00	2.70	6.70
Current [A]	0.07	0.07	0.07	0.08	0.08	0.09
Air flow [m³/h]	30	46	25	50	35	60
Sound pressure level @ 1m [dB(A)]	31	36	26	38	27	38
Sound pressure level @ 3m [dB(A)]	21	26	16	29	27	29
Regeneration efficiency [%]	≤ 85		≤ 85		≤ 85	
Transported air temperature [C]	-15 ... +40		-15 ... +40		-15 ... +40	
Filter	G3		G3		G3	
Ingress Protection Rating [IP]	24		24		24	

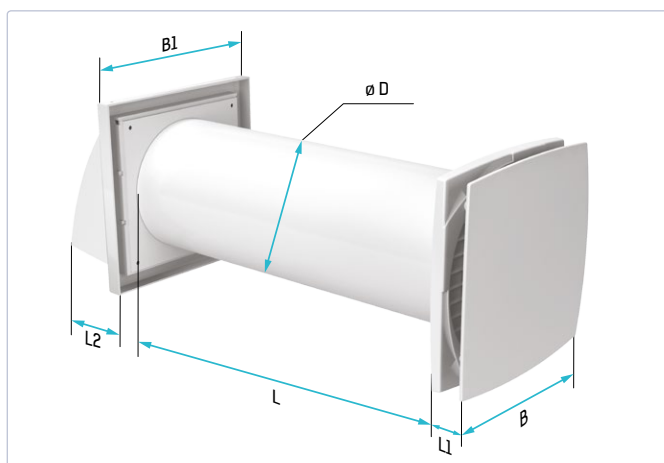

Model	Dimensions [mm]					
	D	B	B1	L	L1	L2
Solo RA1-35-9 R V.2	106	150	153	305-380	35	87
Solo RA1-50-9 R V.2	131	175	186	325-380	35	101
Solo RA1-60-9 R V.2	158	205	186	355-380	35	101